05 40 00.C1

09 72 00.A1

06 16 00.A4

PVC Bathroom
Tiles- Easy to
Install

Substrate (gyp, plywood, cement board)

Metal Studs

1   Wall Type - PVC bathroom tile

Wall Type
1" = 1'-0"

Wall Type PVC Bathroom Tiles

6000

Wintry Mix

Wind Gust

dumawall+®
W A T E R P R O O F   W A L L   T I L E S

- Waterproof, lightweight, rigid PVC

- Scratch- and UV-resistant

- Fast and easy installation, no grout required

- Unique interlocking edges look like grout lines

- Glues onto almost any surface

- Large tile sizes provide broad surface coverage
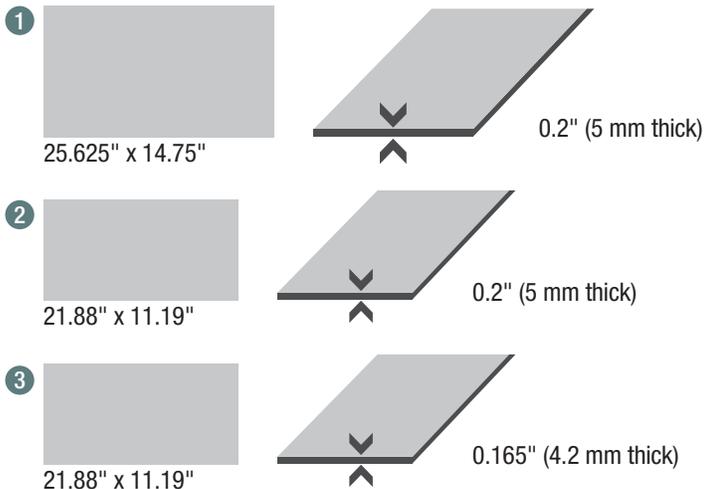
Rain Cloud

dumawall®
WATERPROOF WALL TILES

DumaWall PVC tiles have unique interlocking joints and can be cut to size for an easy, groutless installation. This versatile, low-maintenance tile is perfect for wet areas like showers and bathrooms or for commercial high-traffic areas in multi-family units, hotels, restaurants and hospitals.

Surface Burning Characteristics	ASTM E 84 Class "A" fire-rated – Flame **Class** "C" fire-rated – Smoke
Durability	Waterproof, mold- and mildew-resistant
Material	Virgin-grade rigid PVC
Compatibility	Wall panels install as a glue-up application with recommended adhesive
Warranty	10-year limited warranty

Tile Size Options

1 25.625" x 14.75" — 0.2" (5 mm thick)

2 21.88" x 11.19" — 0.2" (5 mm thick)

3 21.88" x 11.19" — 0.165" (4.2 mm thick)

Matching Trim Options	Item #	Dimensions
Inside Corner Trim (4.2 mm)*	196-##	94" x 0.165" (4.2 mm)
4 Inside Corner Trim (5 mm)	197-##	94" x 0.2" (5 mm)
5 J-Trim (universal)	198-##	94" x 0.2" (5 mm)
6 L-Trim (universal)	199-##	94" x 0.2" (5 mm)

= *trim finish/color—see back page for corresponding #s*
*Inquire for availability

Frost Nickel

Wintry Mix

Wind Gust

4   **5**   **6**
DumaWall trim profiles

Wind Gust

Carrara Marble

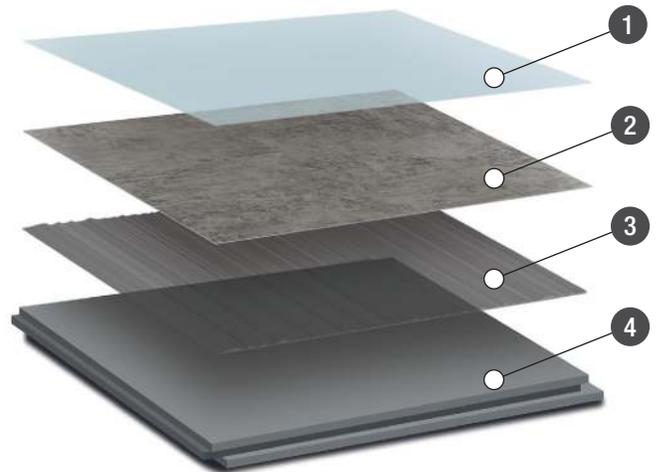**Interlocking joints create a clean look**

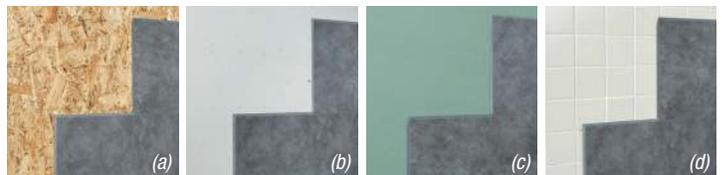**Easy, groutless installation**

Installs in half the time of grouted tile

Durable, Engineered Composition

1 Protective Top Layer

2 Realistically-Printed Multicolored Film

3 Intermediate, High-Quality Stability Layer

4 Rigid Core Board Technology

(a)   *(b)*   *(c)*   *(d)*

DumaWall can be installed over many substrates including (a) OSB/ plywood, (b) drywall, (c) water-resistant board and (d) ceramic tile

1 Tiles – 25.625" x 14.75" x 0.2" (5 mm) • 8 tiles/carton • approx. 21 sq. ft.

Carrara Marble
517-10
Matching Trims 10

Dark Gray Slate
516-12
Matching Trims 12

Dusky Shale
510-01
Matching Trims 01

Frost Nickel
510-02
Matching Trims 02

Light Gray Slate
516-13
Matching Trims 13

Rain Cloud
510-07
Matching Trims 07

Smoked Steel
510-00
Matching Trims 00

Steel Wool
510-05
Matching Trims 05
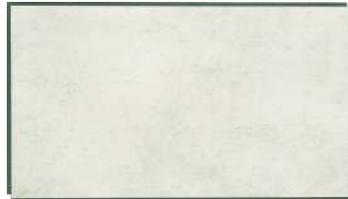
Wind Gust
510-06
Matching Trims 06

Wintry Mix
510-08
Matching Trims 08

2 Tiles – 21.88" x 11.19" x 0.2" (5 mm) tiles • 10 tiles/carton • approx. 16 sq. ft.

Dark Gray Slate
510-12
Matching Trims 12

Light Gray Slate
510-13
Matching Trims 13

3 Tiles – 21.88" x 11.19" x 0.165" (4.2 mm) tiles • 10 tiles/carton • approx. 16 sq. ft.

Carrara Marble
512-10
Matching Trims 10

Dark Gray Slate
512-12
Matching Trims 12

Light Gray Slate
512-13
Matching Trims 13

Wind Gust
512-06
Matching Trims 06

For more information or to place an order, please call 800-434-3750 or email sales@acpideas.com. Visit us online at dumawall-us.com.

D0098 (072820)

Product Name
 DumaWall™ Decorative PVC Wall Panels

Manufacturer's Name
 Acoustic Ceiling Products (ACP)

PRODUCT DESCRIPTION

PRODUCT FEATURES

- DESCRIPTION
    - Extruded PVC wall panels, with a variety of color and finishes.

- BASIC USES / RELATED USES
    - Can simulate different organic surfaces such as concrete and stone.
    - Direct surface application.
    - Suitable spaces for application include restaurants, hotels, churches, historic buildings.

- PRODUCT ATTRIBUTES AND CHARACTERISTICS
    - Tongue and groove configuration for surface mounting applications.
    - Flat textures.
    - Finishes:
        - Pigmented with a variety of colors.
    - Sizes: (14-3/4 x 25- 5/8 inch) (375 x 650 mm) (*these are nominal dimensions, always consult with manufacture for exact dimensions*)

- ENVIRONMENTAL
    - PVC site cuttings and unused pieces can be collected and recycled.
    - Product may be recycled upon final disposal.

- SELECTION CRITERIA
    - Can be glued (surface).
    - Designed for walls where an organic look is desired.

- APPLICABLE STANDARDS, RELATED REFERENCES
    - ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
    - Fire Performance: Per ASTM E 84
        - Flame spread 15, Class A
        - Smoke developed 1100, Class C
    - ASTM E331-00(2016), Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference

PRODUCT DESCRIPTION

- PACKAGING, HANDLING, PROTECTION, AND DELIVERY INSTRUCTIONS
  - Deliver materials within original cartons and take care to handle and protect against unnecessary damages such as moisture, breakage, dirt, surface soiling, etc.
  - Allow all material components to acclimate to room temperatures before installation.

- SPECIAL WARRANTY
  - Limited Warranty: Ten (10) years from product manufacturing defects.

- LIMITATIONS
  - Certain chemical solvents should be avoided, contact manufacturer for more information.

- AVAILABILITY
  - Nationally and internationally.

- COST
  - Refer to Acoustic Ceiling Products (ACP) and authorized representatives for pricing.

PRODUCT PROPERTIES

- MATERIAL, COMPOSITION, AND DESIGN
  - Material: Virgin grade, rigid, polyvinyl chloride (PVC).
  - Recommended adhesives:
    - Loctite® **Power Grab Ultimate**

- SHAPE, MASS, AND DIMENSIONS
  - Thickness:
    - 5 mm (13/64 inches)
    - 4.2 mm (11/64 inches)
  - Available Sizes (nominal): *Note-* certain style panels may vary from nominal dimensions and you should always contact manufacture for dimensions.
    - (14-3/4 x 25-5/8 inch) (375 x 650 mm)
    - (11-1/4 x 21- 1/2 inch) (285.75 x546.1mm)

- FINISH, COLORS AND TEXTURES
  - Standard Colors: Steel Wool (510-05), Ocean Fog (510-03), Graphite Tempest (510-04), Frost Nickel (510-02) Dusky Shale (510-01), Smoked Steel (510-00), Wintry Mix (510-08), Rain Cloud (510-07), Wind Gust (510-06).
    - Wall Panel – 375 x 650 mm (14 3/4 x 25 5/8 inch)

PRODUCT DESCRIPTION

- ■ (285.75 x546.1mm) (11-1/4 x 21- 1/2 inch)
- ○ Trims, to finish wall edges; available. Please contact manufacture for information.

PRODUCT PLACEMENT

- • PREPARATION WORK
    - ○ Perform installation as late as possible in the building process after any dust-generating activities have been completed.
    - ○ Install grid in accordance with installation instructions.

- • INSTALLATION / ERECTION
    - ○ Cutting Panels: Using a table saw or circular saw for clean straight cuts and jig saw for irregular cuts like wall outlets.
    - ○ Surface Mounting:
        - ■ Apply adhesive to substrate using a notched trowel. If a tube adhesive is used, repeated pressing of tiles to substrate may be required.
        - ■ Install Trim (if used), Install full panels, working across the room.
        - ■ Overlap tongue and grove tiles and build across the room
        - ■ Once completed, firmly press all wall tiles to ensure proper adhesive bond.

    - ○ Contact manufacturer for detailed installation guide.

- • MAINTENANCE INSTRUCTIONS AND PROCEDURES
    - ○ Clean with mild soap and water.
    - ○ On a daily basis, moderate dust or vacuum clean with a soft, clean brush attachment. (if necessary)
    - ○ On a weekly basis, provide manual wet cleaning. (if necessary)

Corporate Identification

Acoustic Ceiling Products, L.L.C.
P.O. Box 1581
Appleton, WI, U.S.A. 54912-1581
Phone Toll Free: 1-800-434-3750
Fax Toll Free: 1-800–434-3751
Website: acpideas.com
Email: customersupport@acpideas.com

Product Name
   DumaWall™ Decorative PVC Wall Panels

Manufacturer's Name
   Acoustic Ceiling Products (ACP)

PRODUCT DESCRIPTION

Technical Services Available

   Product available nationally and internationally or from regional representatives.

Classification and Filing

   MasterFormat 1995
      Section 09510 - PVC Wall Panels
   MasterFormat 2004
      Section 09 51 00 - PVC Wall Panels